





Ravaglioli

10,000 bs
2 Post Life

KPH

370.42KU

COMPANY WITH QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV = ISO 9001:2008 =


KPH 370.42 KU 10,000 lbs


Perfect synchronization between carriages regardless of load distribution.

Equipped with safety valve to prevent overloading and in case of hydraulic pipe fracture.


Self-controlled lowering speed. Three-stage short arms and two-stage long arms provide asymmetric lifting of vans and off-road vehicles.





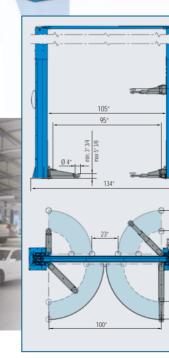



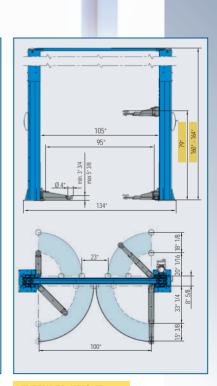

EXTENDED HEIGHT KPH370.42KU





KPH370.42 LIKU - Extended height

Also available with standard height KPH 370.42 LIKU + VAR 3725

Mechanical safety latch with automatic engagement ensuring maximum safety when lift is in standing position.







Each column features a maintenance-free lifting cylinder.



Adjustable height

RAV Equipment U.S.A. Inc. 800.816.8138 info@ravamerica .com www.ravamerica.com

INTERNATIONAL


Ravaglioli S.p.A. 40037 Sasso Marconi Fraz. Pontecchio M. P.O.B. 1690 - Bologna - Italia Tel. +39 - 051 - 6781511 Fax +39 - 051 - 846349 rav@ravaglioli.com www.ravaglioli.com

Automatic arm locking during lifting and automatic unlocking when the arm reaches the floor-self-locking conical design





Truck adapters (4 pcs)



S 305 A9 Spacers for Mercedes Sprinter (2+2 pcs)

TECHNICAL DATA Single-phase 220 V - 60 cycles motor 2 HP Three-phase 220 V - 60 cycles motor 4 HP Shipping Weight 1653 lbs

